



CAR WASH LIGHTS

FORMERLY "MILE HIGH LED SYSTEMS"

LEDTUBE-DRIVERLESS

Product Description

The driverless LEDTUBE-X is a light made for car washes. Connects directly to AC line voltage without a LED driver. Waterproof, chemical resistant and highly efficient. Installation is easy with twist and click connectors. Daisy chainable up to 100ft of light and driverless design ensure simple, fast installation.

Replacement fixture, suitable for wall mount, ceiling mount and virtually any indoor or outdoor (including wet) locations.

Ideal when light spacing, simplicity and ease of install is the primary concern.

PERFORMANCE SUMMARY

- 950 lumens per foot
- Efficacy: 140+ Lumens / Watt
- IP67
- 120V direct AC
- CCT: 5000K
- CRI: 80 minimum
- 5 Year Warranty
- LED Life: 100,000 hours
- UL Listed
- Complies with USA and Canadian safety standards
- 27W per 4 foot tube and 40W per 6 foot tube
- Run length up to 100ft of fixture, not including



DIRECT AC DRIVERLESS




Ordering Information

Example: LEDTUBE-4-DL-C-2

| Product | Version | Version | Tube Type Connection | Cable Lengths |
|---------|-----------------|----------------------|------------------------|---------------|
| LEDTUBE | 4 - 4ft fixture | DL - Driverless | I - Inline, Dual Sided | 2ft |
| | 6 - 6ft fixture | ED - External Driver | C - Capped, End of Run | 6ft |



Photometry

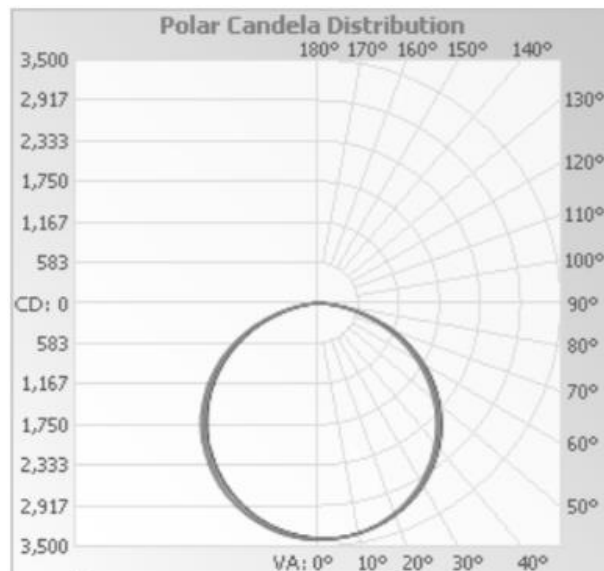

Fixture photometry has been conducted by an accredited NVLAP testing laboratory in accordance with IESNA LM-79-08.





CAR WASH LIGHTS

FORMERLY "MILE HIGH LED SYSTEMS"

LEDTUBE-EXTERNAL DRIVER

Product Description

The LEDTUBE-X is a light made for car washes. Powered by a driver for maximum light output and efficacy. Waterproof, chemical resistant and highly efficient. Installation is easy with twist and click connectors. Daisy chainable up to 32 of light.

Replacement fixture, suitable for wall mount, ceiling mount and virtually any indoor or outdoor (including wet) locations.

Ideal when maximum light output per foot is needed.

PERFORMANCE SUMMARY

- 1500 lumens per foot
- Efficacy: 166 Lumens / Watt
- CCT: 5000K
- IP67
- CRI: 80 minimum
- 5 Year Warranty
- LED Life: 100,000 hours
- UL Listed
- Complies with USA and Canadian safety standards
- 36W per 4 foot tube and 54W per 6 foot tube
- Run length up to 32 of fixture, not including cables



Ordering Information


Example: LEDTUBE-4-DL-C-3

| Product | Version | Version | Tube Type Connection | Cable Lengths |
|---------|-----------------|----------------------|------------------------|---------------|
| LEDTUBE | 4 - 4ft fixture | DL - Driverless | I - Inline, Dual Sided | Specify |
| | 6 - 6ft fixture | ED - External Driver | C - Capped, End of Run | 0.1-3 ft |
| | | | | 3.1-10 ft |
| | | | | 10.1-25 ft |



External Driver operates at 90-300VAC. IP67 ingress protection level allows indoor and outdoor use. All models include wet-location junction boxes.

Photometry

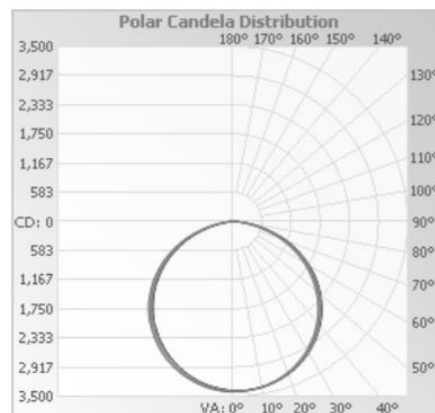

Fixture photometry has been conducted by an accredited NVLAP testing laboratory in accordance with IESNA LM-79-08.